


# Centre of Road Grates

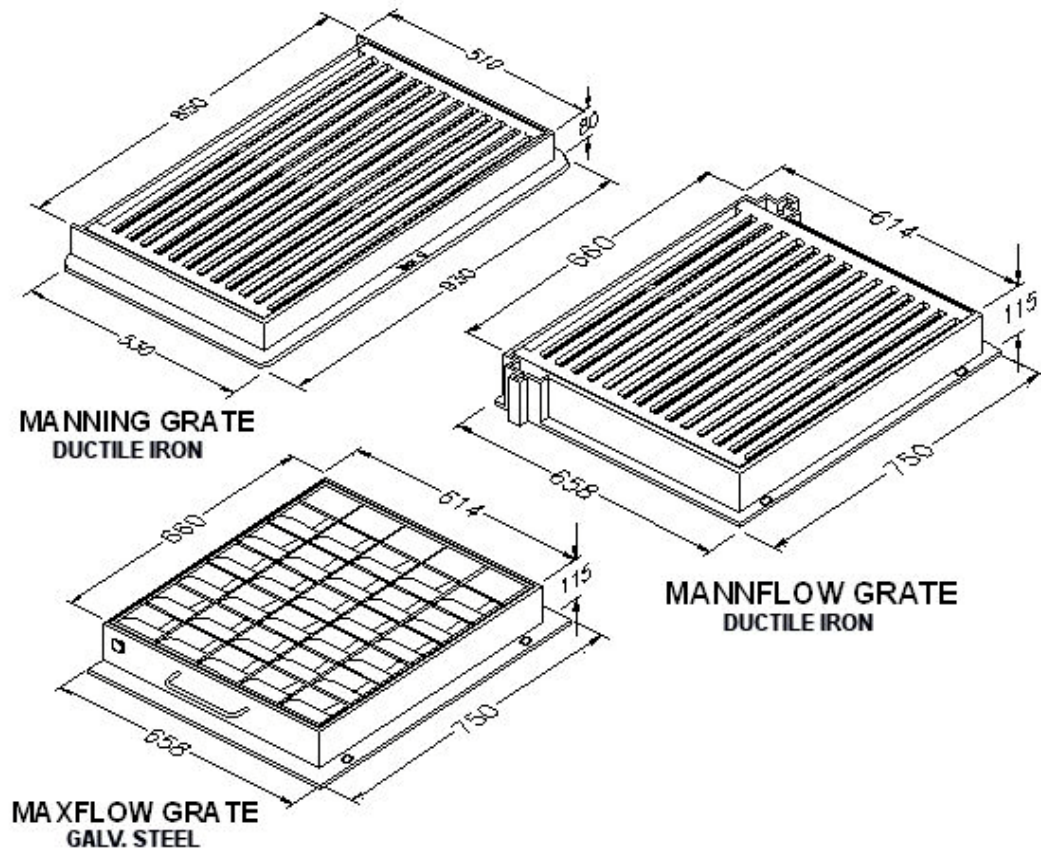

## General description

The *Manning* (pictured) and *Mannflow* grates, with bars aligned with the flow, are ideal for centre of road drainage in areas frequented by pedestrians such as town house access, car parks and shopping centre precincts. The *Maxflow* is used on subdivisional roads to cater for larger flows. Double grates, as shown, capture 1.4 times the single grate.

## AS 3996 Compliance

- Material and manufacturing quality.
- Class D load capacity.
- Bicycle safety
- Pedestrians – *Manning/Mannflow*, 17mm slots, conservatively satisfy Clause 3.3.5 Pedestrian Safety requirements.